

PUBLIC WORKS DEPARTMENT
CITY OF SAN BERNARDINO
STATE OF CALIFORNIA

ADDENDUM NO. ONE

FOR

BID AND CONTRACT DOCUMENTS
FOR

PLANS AND SPECIAL PROVISIONS NO. 13036

FOR

CONSTRUCTION OF ADA ACCESS RAMP & SIDEWALK IMPROVEMENTS,
DOWNTOWN ROUTE (SS-B) 2015

The Special Provisions for this project have been amended as follows:

1. The **BID OPENING DATE** of Tuesday, March 8, 2016, at 2:00 p.m.
has been changed to:

TUESDAY, March 22, 2016, at 2:00 PM

2. Replace page SP-7 **TIME OF COMPLETION** 6-7.1 Working days

Was 40 working days

IS 60 working days

3. Replace page SP-7 **NOTICE TO PROCEED**

Was “The Agency will issue the Notice to Proceed **no later than 5** working days after the pre-Construction meeting”.

IS “The Agency will issue the Notice to Proceed **within 10** working days after the pre-Construction meeting, **provided all items in 6-1.2 Commencement of work have been completed**”.

4. The **BID SCHEDULE has been Revised** into 2 (two) Bid Schedules. The Bid Schedule for the Project shall be replaced in its entirety with the revised Bid Schedules entitled,

ADDENDUM NO. ONE. Contractor is notified that he shall submit referenced **ADDENDUM ONE**, as part of his Bid Documents.

5. The **ATTACHMENTS** indicating locations have been updated to reflect the Bid Schedules and are provided in this Addendum.

ALL BIDDERS SHALL INDICATE RECEIPT OF THIS **ADDENDUM NO. ONE** AS REQUIRED ON PAGE C-1, "**ACKNOWLEDGEMENT OF ADDENDUMS**", OF THE BID DOCUMENTS OF THESE SPECIAL PROVISIONS.

BY: 
AMER JAKHER, P.E.
Contract City Engineer

DATE: 3/8/16.

ATTACHMENTS
TO
ADDENDUM NO. ONE
(PAGES NOT NUMBERED)

BID SCHEDULE

**CONSTRUCTION OF ADA ACCESS RAMP & SIDEWALK IMPROVEMENTS,
DOWNTOWN ROUTE (SS-B) 2015 PLANS AND SPECIAL PROVISIONS NO. 13036**

Name of Bidder: _____

ITEM NO.	DESCRIPTION OF ITEMS	UNIT	ESTIMATED QUANTITY	UNIT PRICE (\$)	TOTAL (\$)
1	MOBILIZATION	LS	1		
2	TRAFFIC CONTROL	LS	1		
3	CLEARING AND GRUBBING UNCLASSIFIED EXCAVATION & UNCLASSIFIED FILL	LS	1		
4	CONSTRUCT PCC CURB RAMP INCLUDING RETAINING CURB PER SPPWC 111-5	EA	10		
5	MODIFY EXIST. PCC CURB RAMP PER SPPWC 111-5 INCLUDING GRINDING LIP / INSTALL DETECTABLE WARNING PER PLAN	EA	9		
6	RELOCATE SIGN PER CITY STD 504	EA	2		
7	CONSTRUCT PCC COMMERCIAL DRIVEWAY APPROACH TYPE I PER CITY STD 204 AND THE SPECIAL PROVISIONS	SF	5,500		
8	CONSTRUCT PCC COMMERCIAL DRIVEWAY BY-PASS PER CITY STD 204 TYPE I AND THE SPECIAL PROVISIONS	SF	268		
9	CONSTRUCT PCC SIDEWALK PER CITY STD 202 AND THE SPECIAL PROVISIONS	SF	9,630		
10	CONSTRUCT PCC SIDEWALK BY-PASS INCLUDING RETAINING CURB AS REQUIRED PER CITY STD 202 AND THE SPECIAL PROVISIONS	SF	46		
11	CONSTRUCT PCC CURB TYPE "A" PER CITY STD 200 AND THE SPECIAL PROVISIONS	LF	53		
12	CONSTRUCT PCC CURB & GUTTER TYPE "B" PER CITY STD 200 AND THE SPECIAL PROVISIONS	LF	62		
13	CONSTRUCT PCC CROSS GUTTER/SPANDREL PER CITY STD 201 AND THE SPECIAL PROVISIONS	SF	700		
14	GRIND PCC SIDEWALK SURFACES INACCORDANCE WITH CALDAG FIG CD-8B	LF	273		
15	ADJUSTMENT CITY PB / COVERS TO GRADE	EA	28		
16	INSTALL METAL HAND RAILING, TYPE "A" PER SPPWC STD PLAN 606-4	LF	16		
17	TREE REMOVAL	EA	3		

BID SCHEDULE

**CONSTRUCTION OF ADA ACCESS RAMP & SIDEWALK IMPROVEMENTS,
DOWNTOWN ROUTE (SS-B) 2015 PLANS AND SPECIAL PROVISIONS NO. 13036**

Name of Bidder: _____

ITEM NO.	DESCRIPTION	UNIT	ESTIMATED QUANTITY	UNIT PRICE (\$)	TOTAL (\$)
18	RESET TREE FRAME AND GRATING	TN	8		
19	STREET STRUCTURAL REPAIR per CITY STD 310	TN	500		
20	ASPHALT CONCRETE	LS	47		
21	CRUSHED AGGREGATE BASE	EA	39		
22	RESTORATION LANDSCAPE, IRRIGATION and LANDSCAPE CURB	LS	1		
23	BALLARD REMOVAL	SF	4		
24	SURVEYING per the SPECIAL PROVISIONS	SF	1		
25	CONSTRUCT AC COMMERCIAL DRIVEWAY BY-PASS PER CITY STD 204 TYPE I AND THE SPECIAL PROVISIONS	EA	520		
26	CONSTRUCT AC SIDEWALK BY-PASS INCLUDING RETAINING CURB AS REQUIRED PER CITY STD 202 AND THE SPECIAL PROVISIONS	SF	138		
27	CONSTRUCT PCC LOCAL DEPRESSION PER CITY STD 407 AND THE SPECIAL PROVISIONS	EA	1		
28	CONSTRUCT PCC BUS PAD SECTION PER SPPWC PLAN 131-2 AND THE SPECIAL PROVISIONS	SF	244		

TOTAL BID SCHEDULE \$ _____

ADDITIVE BID SCHEDULE

**CONSTRUCTION OF ADA ACCESS RAMP & SIDEWALK IMPROVEMENTS,
DOWNTOWN ROUTE (SS-B) 2015 PLANS AND SPECIAL PROVISIONS NO. 13036**

Name of Bidder: _____

ITEM NO.	DESCRIPTION OF ITEMS	UNIT	ESTIMATED QUANTITY	UNIT PRICE (\$)	TOTAL (\$)
1	MOBILIZATION	LS	1		
2	TRAFFIC CONTROL	LS	1		
3	CLEARING AND GRUBBING UNCLASSIFIED EXCAVATION & UNCLASSIFIED FILL	LS	1		
4	CONSTRUCT PCC CURB RAMP INCLUDING RETAINING CURB PER SPPWC 111-5	EA	7		
5	CONSTRUCT PCC SIDEWALK PER CITY STD 202, THE PLANS AND THE SPECIAL PROVISIONS	SF	852		
6	CONSTRUCT PCC PEDESTRIAN PAD PER CITY STD 202, THE PLANS AND THE SPECIAL PROVISIONS	SF	1467		
7	CONSTRUCT PCC SIDEWALK PER CITY STD 202, THE PLANS AND THE SPECIAL PROVISIONS	SF	1814		
8	CONSTRUCT PCC CROSS GUTTER/SPANDREL PER CITY STD 201 AND THE SPECIAL PROVISIONS	SF	130		
9	CONSTRUCT PCC 6" CURB TYPE "A" PER CITY STD 200, THE PLANS AND THE SPECIAL PROVISIONS	LF	48		
10	CONSTRUCT PCC CURB TYPE "A" PER CITY STD 200, THE PLANS AND THE SPECIAL PROVISIONS	LF	60		
11	CONSTRUCT PCC CURB & GUTTER TYPE "B" PER CITY STD 200 , THE PLANS AND THE SPECIAL PROVISIONS	LF	85		
12	CONSTRUCT PCC CURB & 26" GUTTER TYPE "B" PER CITY STD 200 , THE PLANS AND THE SPECIAL PROVISIONS	LF	5		
13	CONSTRUCT PCC CURB & 36" GUTTER TYPE "B" PER CITY STD 200 , THE PLANS AND THE SPECIAL PROVISIONS	LF	187		
14	CONSTRUCT PCC CURB & 60" GUTTER TYPE "B" PER CITY STD 200 , THE PLANS AND THE SPECIAL PROVISIONS	LF	10		
15	CONSTRUCT PCC DRIVEWAY PER CITY STD 203 , THE PLANS AND THE SPECIAL PROVISIONS	SF	381		
16	REMOVE AND CONSTRUCT 3" THICK ASPHALT OVER COMPACTED NATIVE PER THE PLANS AND SPECIAL PROVISIONS	SF	150		

ADDITIVE BID SCHEDULE

**CONSTRUCTION OF ADA ACCESS RAMP & SIDEWALK IMPROVEMENTS,
DOWNTOWN ROUTE (SS-B) 2015 PLANS AND SPECIAL PROVISIONS NO. 13036**

Name of Bidder: _____

ITEM NO.	DESCRIPTION	UNIT	ESTIMATED QUANTITY	UNIT PRICE (\$)	TOTAL (\$)
17	REMOVE AND CONSTRUCT 4" THICK ASPHALT OVER 6" AGGREGATE BASE PER THE PLANS AND SPECIAL PROVISIONS	SF	451		
18	REMOVE AND CONSTRUCT 6" THICK ASPHALT OVER 8" AGGREGATE BASE PER THE PLANS AND SPECIAL PROVISIONS	SF	350		
19	REMOVE AND CONSTRUCT 8" THICK ASPHALT OVER 12" AGGREGATE BASE PER THE PLANS AND SPECIAL PROVISIONS	SF	1120		
20	RESET EXISTING BUS EQUIPMENT	EA	6		

TOTAL BID "ADDITIVE" SCHEDULE \$ _____

SUMMARY OF BID SCHEDULES

**CONSTRUCTION OF ADA ACCESS RAMP & SIDEWALK IMPROVEMENTS,
DOWNTOWN ROUTE (SS-B) 2015 PLANS AND SPECIAL PROVISIONS NO. 13036**

BIDDER: _____
(Contractor Name)

TOTAL BID SCHEDULE \$ _____(FIGURES)

TOTAL ADDITIVE BID SCHEDULE \$ -----(FIGURES)

GRAND TOTAL BID* \$ _____(FIGURES)

***Grand Total Bid is equal to the total of Bid Schedule, plus Additive Bid Schedule.**

BID NOTES:

The unit price must be shown in figures, for all work items. All blank spaces appearing above must be filled in. In case of discrepancy in Bid Amounts, **“UNIT” prices shall govern over extended “TOTAL” amounts.**

CITY reserves the right to award a Contract to the lowest responsible bidder for the **GRAND TOTAL BID** (the combined total of Bid Schedule, plus Additive Bid Schedule). **THE CITY ALSO RESERVE THE RIGHT TO AWARD BID SCHEDULE WITHOUT ADDITIVE BID SCHEDULE. Submitted bids must include complete bid amounts for each bid item of each Bid Schedule to be considered valid bids.**

The total bid price for the entire Contract work shall include the cost of labor, materials, equipment, parts, implements, supplies, and all applicable sales taxes and fees necessary to complete the Project, as based on the City Engineer’s estimate of quantities of work.

The total price must be extended for each item of work and the total of all items inserted in the space provided. **Bidders shall complete and submit entire BID DOCUMENTS section as their Bid to the CITY. Failure to do so will result in the Bid being non-responsive.**

Any situation not specifically provided for will be determined at the discretion of the City of San Bernardino (CITY), and that discretion will be exercised in the manner deemed by the CITY to best protect the public interest in the prompt and economical completion of the work. The decision of the CITY respecting the amount of a Bid, or the existence or treatment of an irregularity in a Bid, shall be final.

BIDDER declares that this Bid is based upon careful examination of the work site, Bid and Contract Documents.

Estimated quantities are for the purpose of comparison only, and payments will be made on a basis of actual measurement of work completed except for Lump Sum (LS) and Final (F) pay quantities.

Codes:

Units of Measurement:

(F)	Final Pay Quantity	EA	Each
(S)	Specialty Bid Item	LS	Lump Sum
(D)	Deletable Work Item	SF	Square Foot
		SY	Square Yard
		ELT	Extra Long Ton
		LF	Linear Feet
		TN	Ton

(D) Deletable work item; only to be incorporated in the work as provided via written direction from the Engineer.

(S) Specialty Bid Item – are bid items that are considered part of the total base bid but are not considered part of the Contractor’s obligation to perform at least fifty percent (50%) of the work as specified in Section 2-3.2, “Additional Responsibility,” of the Standard Specifications.

(F) Final Pay Quantity - are bid items as described in Section 6-1.07 of these Special Provisions.

SECTION 6 – PROSECUTION, PROGRESS, AND ACCEPTANCE OF THE WORK

6-1 CONSTRUCTION SCHEDULE AND COMMENCEMENT OF THE WORK.

6-1.2 Commencement of the Work. *Replace the entire subsection with the following:*

Pre-Construction Meeting: Within 10 working days of the award notification, the Contractor shall attend a Pre-Construction Meeting in the office of the City Engineer, Public Works Department, Third Floor, City Hall, 300 North "D" Street, San Bernardino, CA 92418. The Contractor shall coordinate with the Engineer to determine the time and date of the Pre-Construction Meeting. At the Pre-Construction Meeting, if not previously submitted, the Contractor shall submit to the Engineer the following documents: (1) Three original copies of the executed Contract Documents; (2) Three original copies of the required liability insurance policies; (3) Three original copies of the required workers' compensation insurance policies; (4) Three original copies of the required Payment and Performance Bonds; (5) Two copies of the Construction Schedule; (6) Two copies of the Traffic Control Plan; (7) One copy of the Contractor's City Business License; (8) One copy of all City of San Bernardino permits necessary to perform the Work; and (9) One copy of all permits issued by other governmental entities necessary to perform the Work.

Notice to Proceed: The Agency will issue the Notice to Proceed with-in 10 working days after the Pre-Construction Meeting provided all items in 6-1.2 Commencement of the work have been completed. The Contract time shall commence upon the date of issuance of the Notice to Proceed.

6-1.2 PROSECUTION OF THE WORK. *Add the following:*

The Contractor shall protect the work area from nuisance and storm water flows which could have a negative impact on construction operations and/or delay the work. The Contractor shall employ temporary sandbags, pumps, conduit, and other means necessary to divert these water flows to protect the work area. Payment for protection of the work area from water flows shall be considered as included in the Contract Unit price for each item of the Bid and no additional compensation shall be allowed.

6-7 TIME OF COMPLETION.

6-7.1 General. *Replace the entire subsection with the following:*

The Contractor shall diligently prosecute the work to completion before the expiration of 60 working days from the date of the Notice to Proceed.

6-7.2 Working Day. *Replace the entire subsection with the following:*


Work activities shall be confined to the hours between 7:00 a.m. and 4:30 p.m. on the working days defined herein.

A working day is any day within the period between the date of the start of the Contract time as specified in 6-1 and the date of field acceptance of the Work by the Engineer, other than:

1. Saturday and Sunday.
2. January 2, 2012; January 16, 2012; February 20, 2012; May 28, 2012; July 4, 2012; September 3, 2012; November 12, 2012; November 22, 2012; December 24, 2012; December 25, 2012; December 31, 2012; and January 1, 2013.
3. Any day designated as a holiday in a Master Labor Agreement entered into by the Contractor or on behalf of the Contractor as an eligible member of a contractor association.
4. Any day the Contractor is prevented from working at the beginning of the workday for cause as specified in 6-6.1.
5. Any day the Contractor is prevented from working during the first 5 hours with at least 60 percent of the normal work force for cause as specified in 6-6.1.


Kendall Dr at University Street

Stop 5458

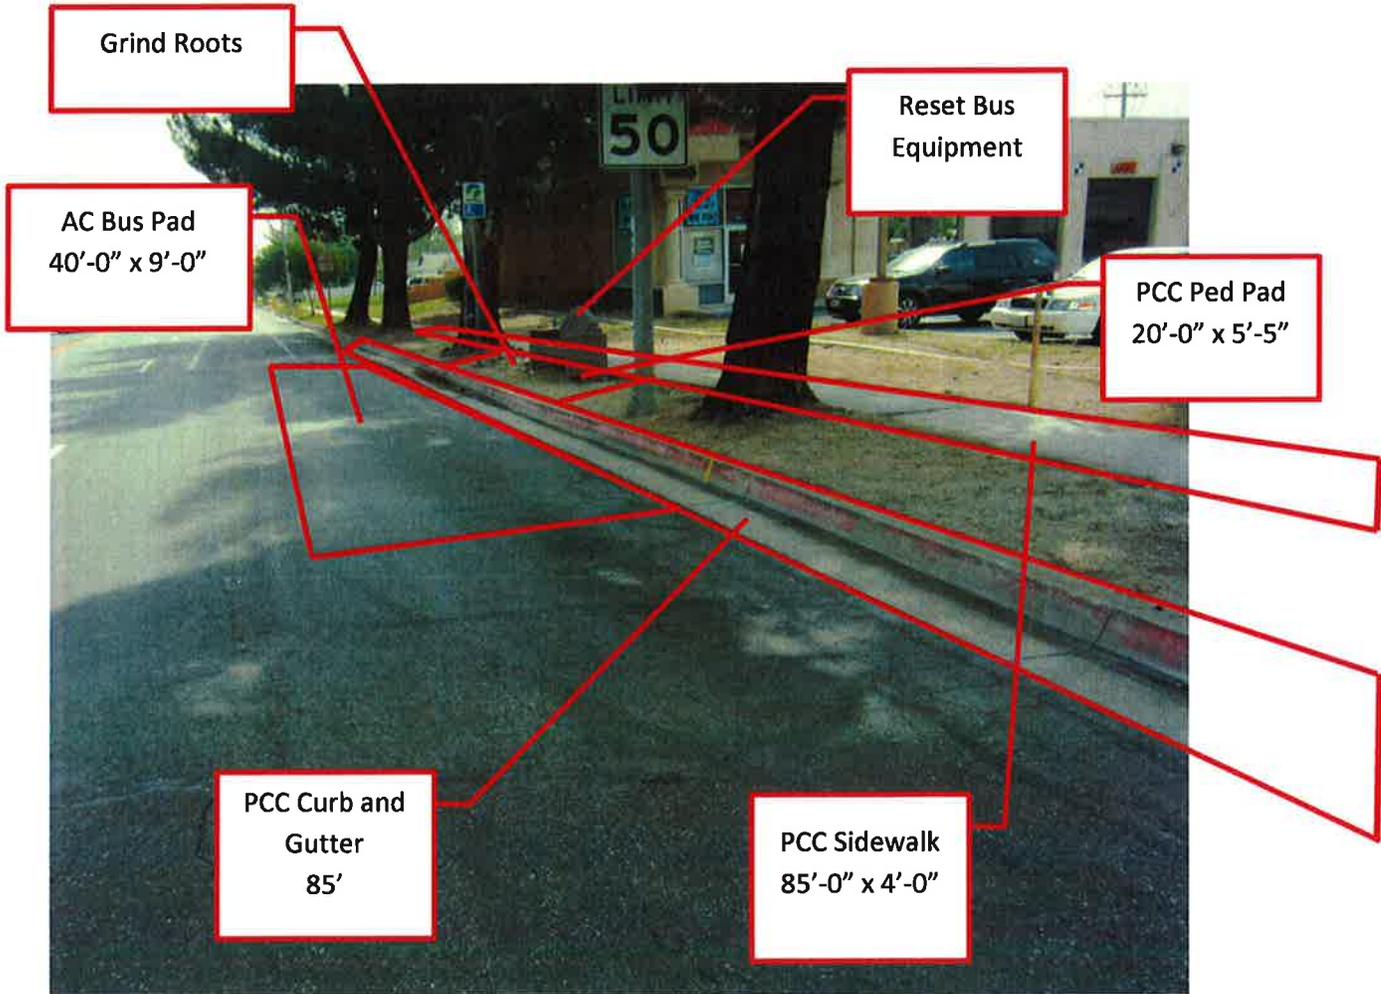

Del Rosa Ave at Date Street

Stop 6174

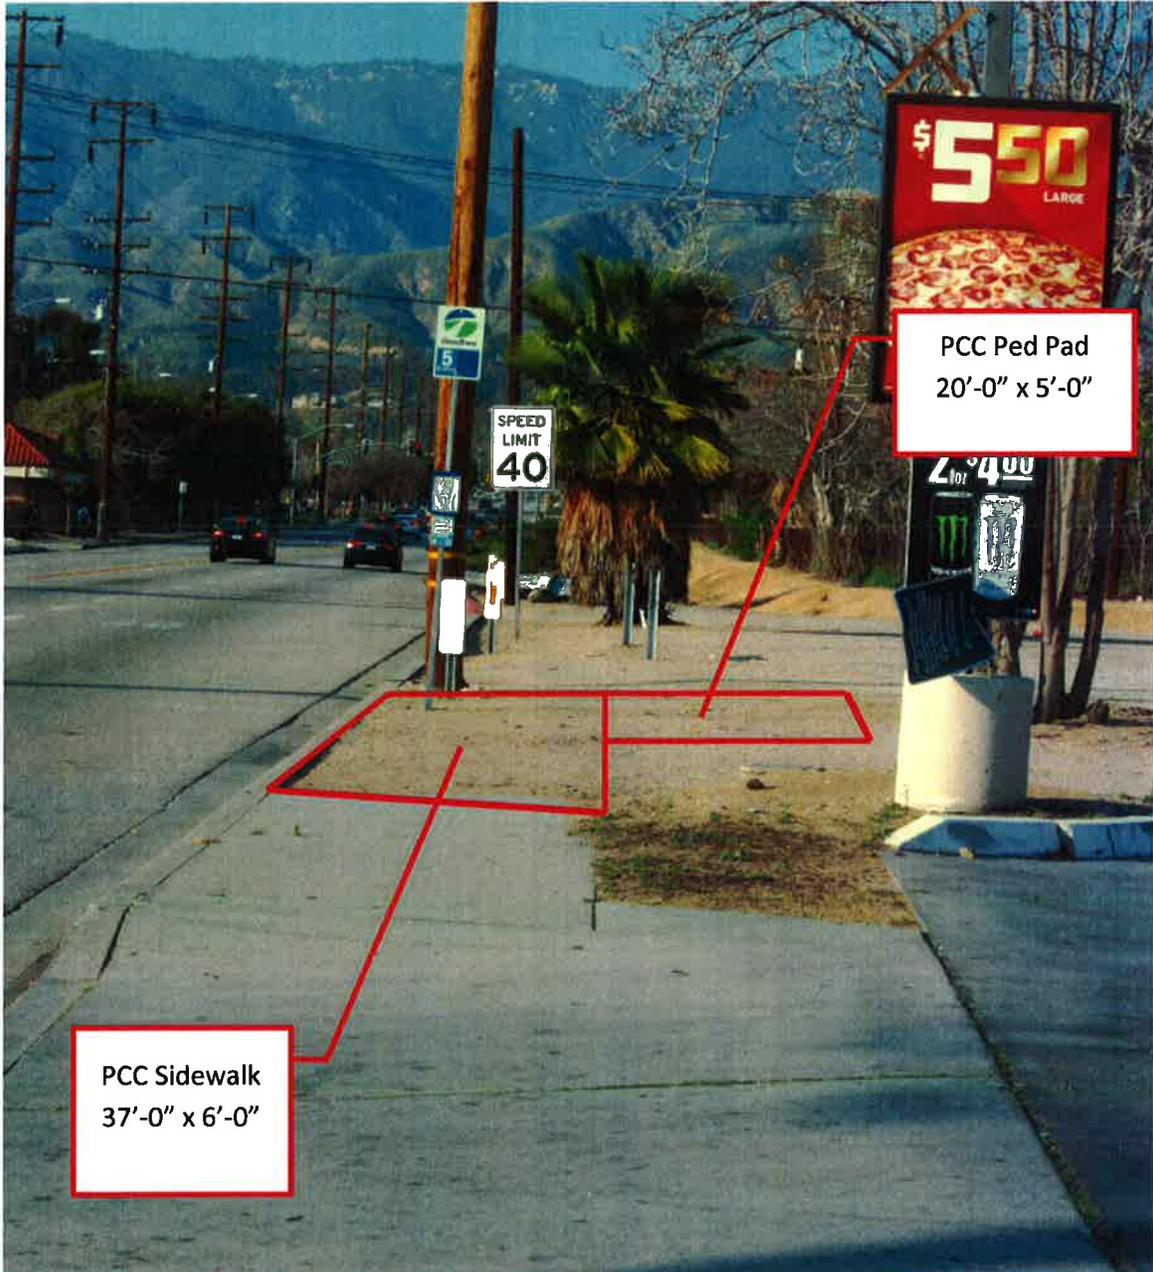


PCC Sidewalk
37'-0" x 6'-0"

PCC Ped Pad
20'-0" x 5'-0"

9th Street at Medical Center Drive WB

Stop 0051

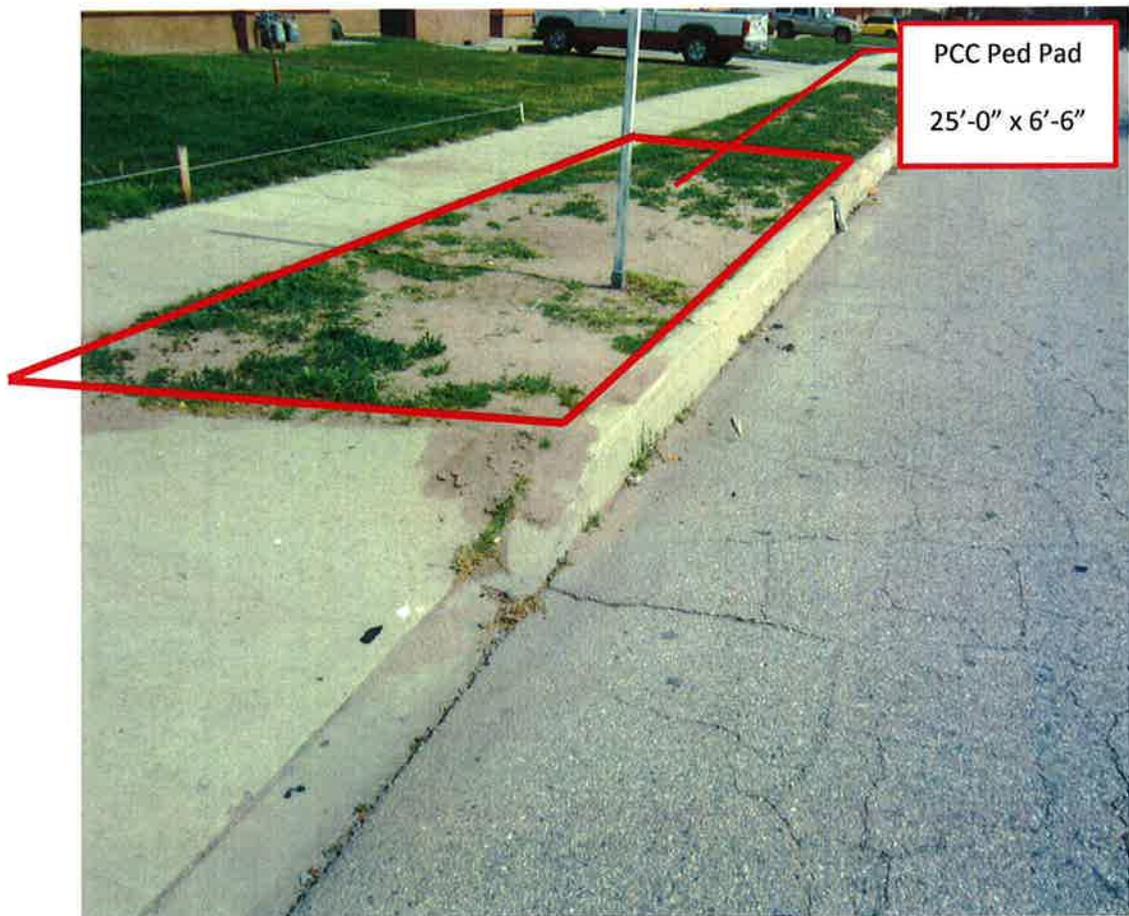


Waterman Ave at 5th Street

Stop 5262




Sierra Way at 16th Street

Stop 5385

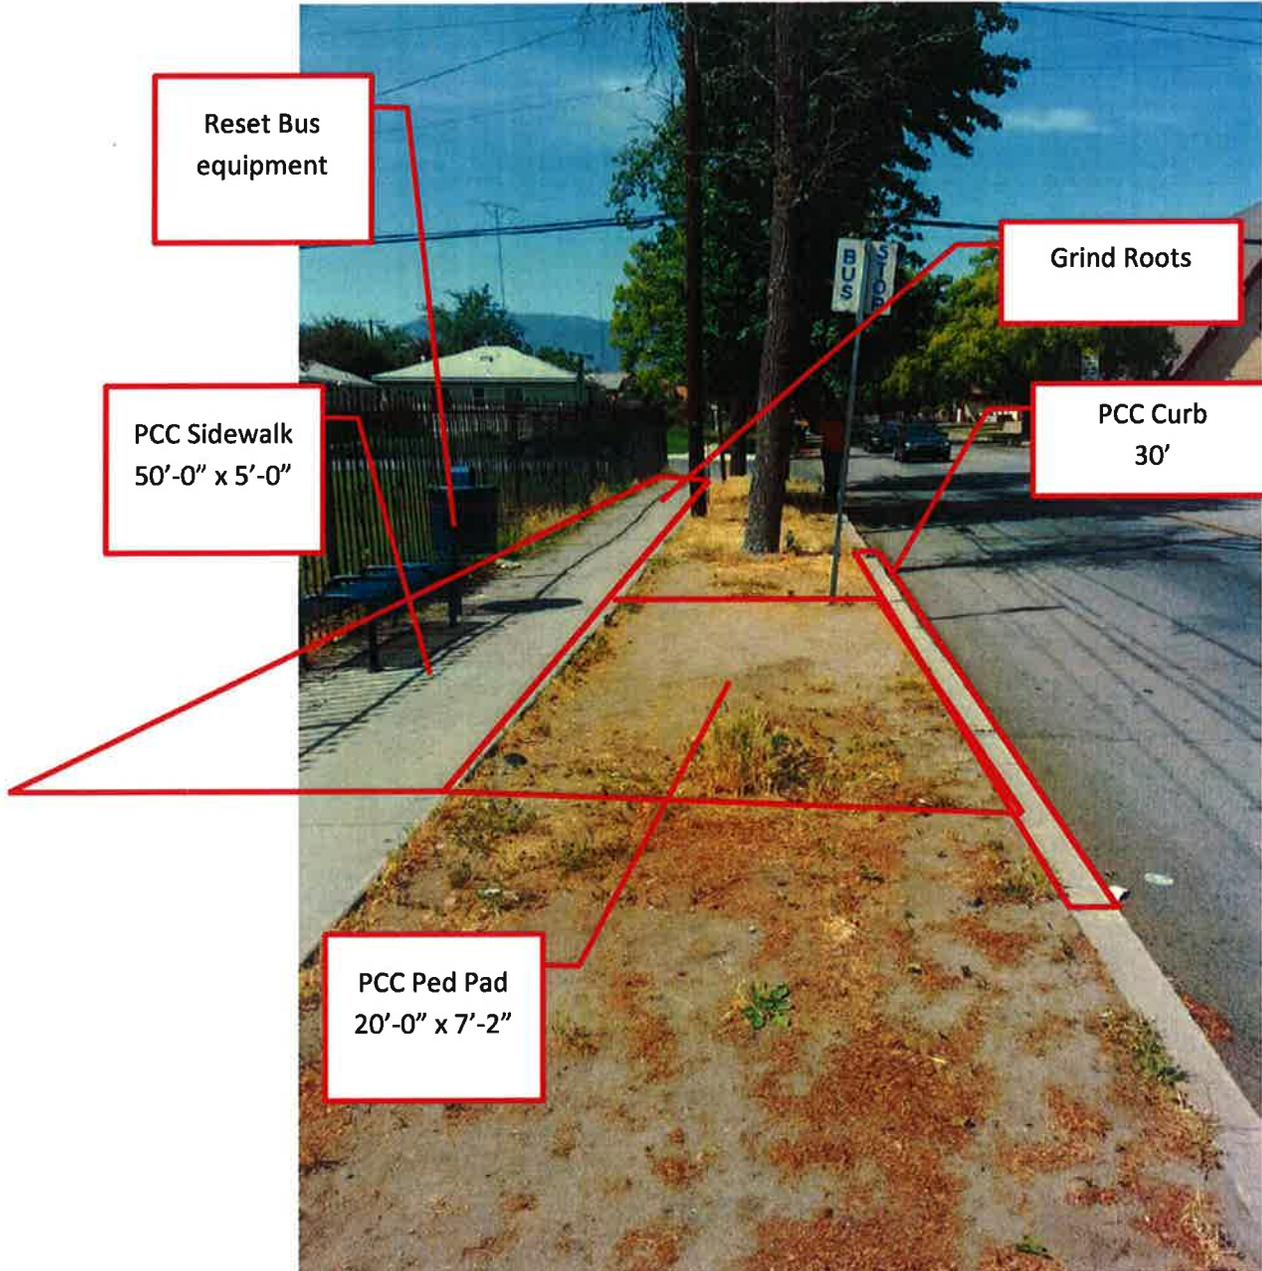

Kendall Dr at "H" Street

Stop 5549

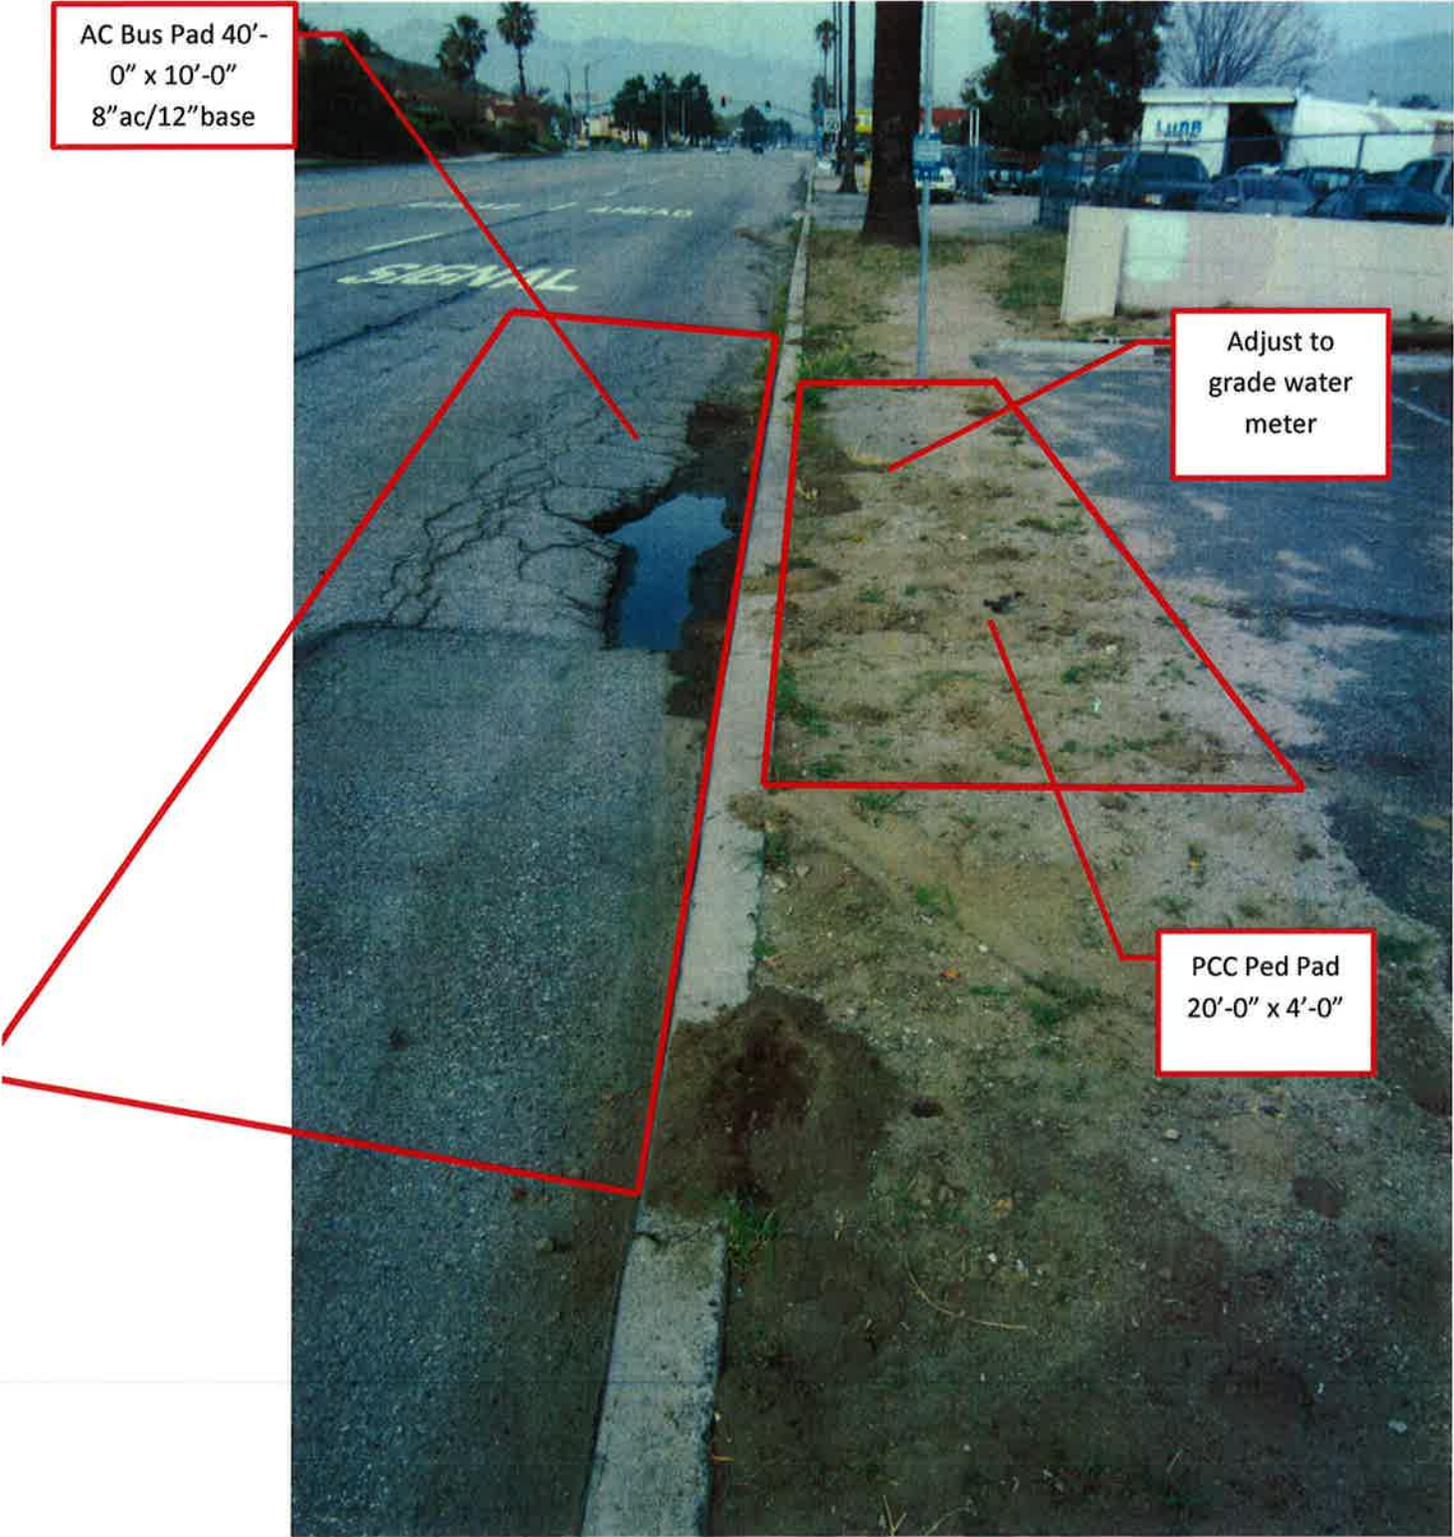


AC Bus Pad 40'-0" x 10'-0" 8"ac/12"base

Adjust to grade water meter

PCC Ped Pad 20'-0" x 4'-0"


9th Street at Western Ave WB

Stop 5742

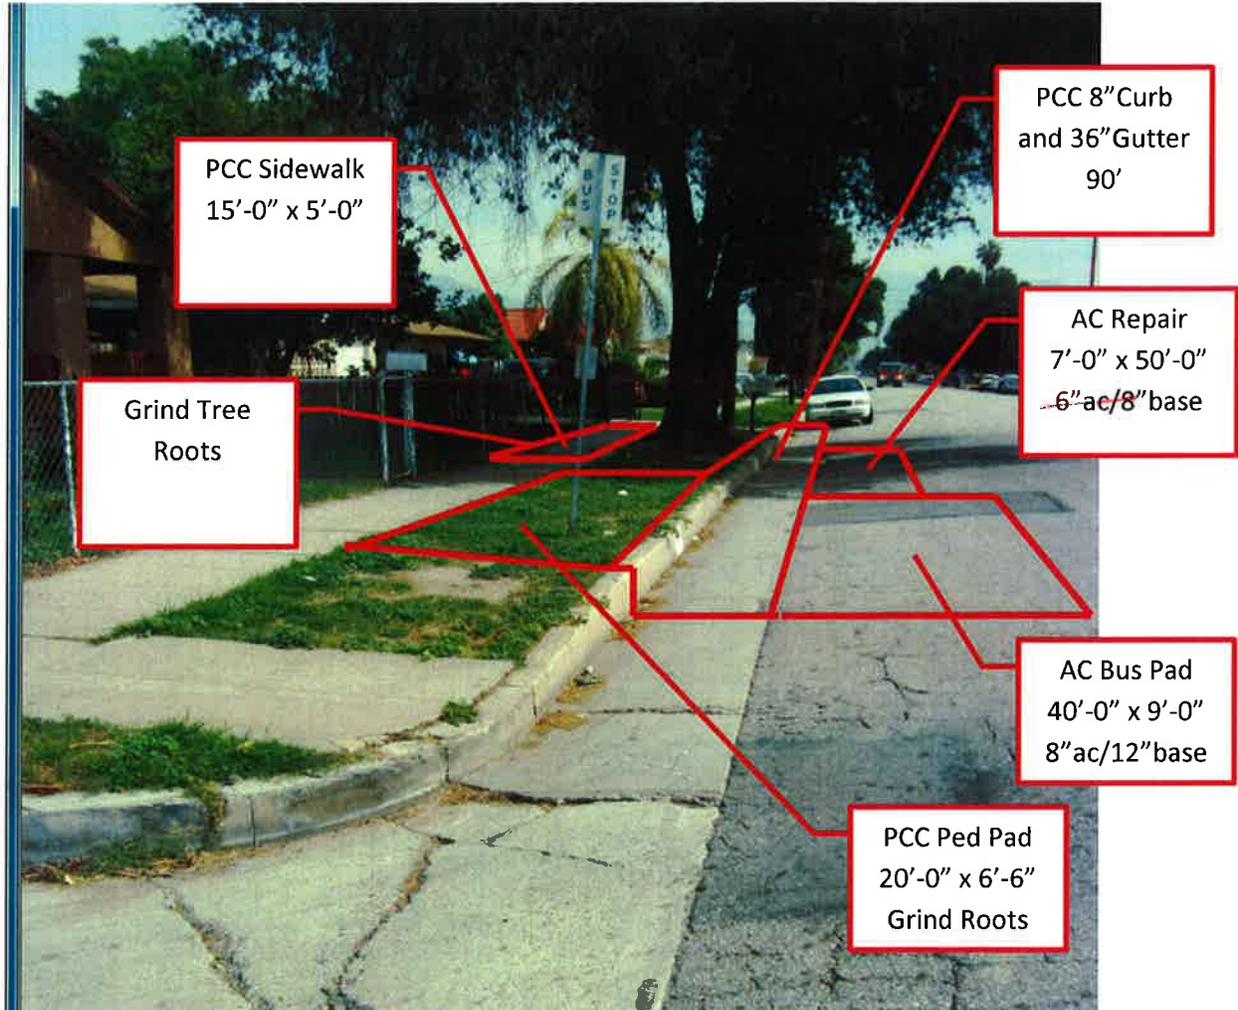


Sierra Way at 16th Street

Stop 5449

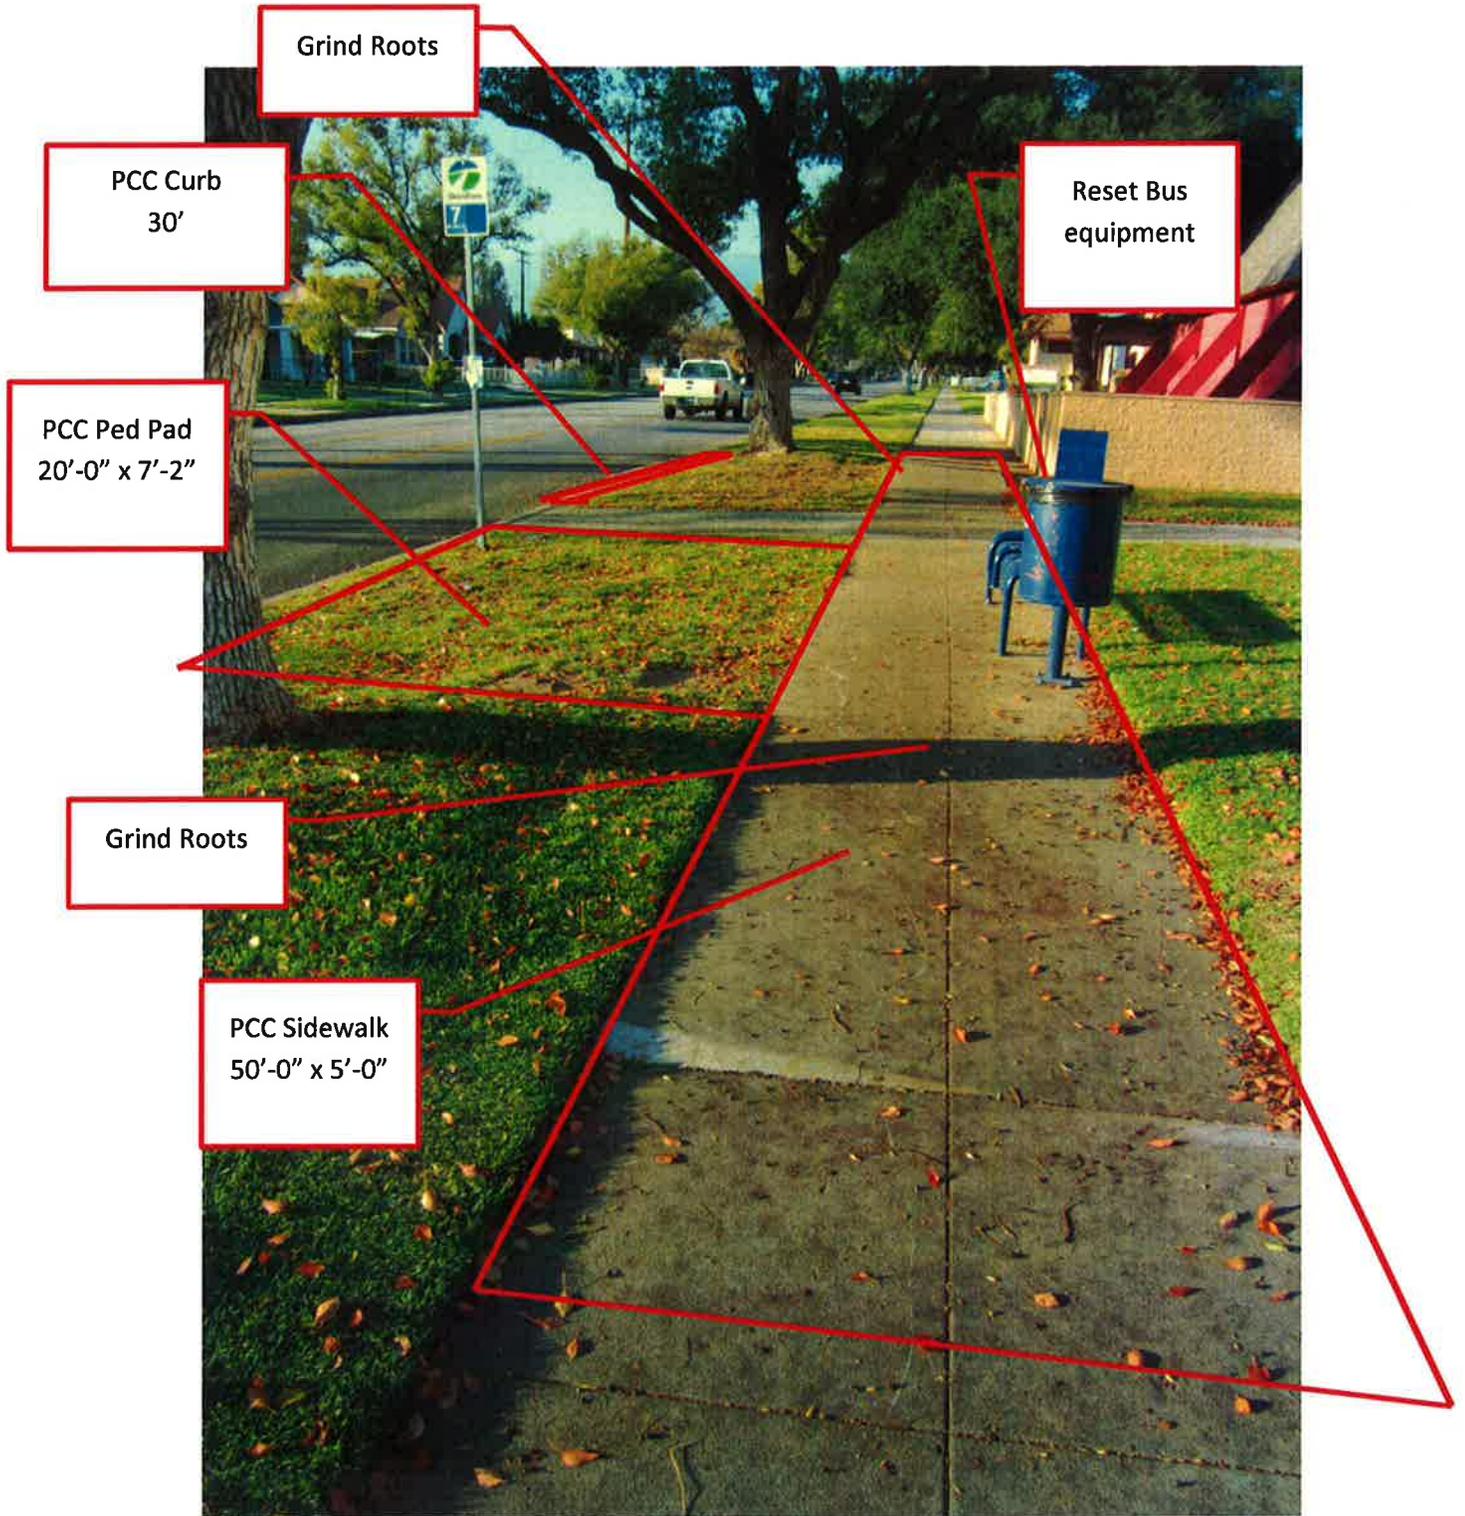


Sierra Way at 30th Street

Stop 5389

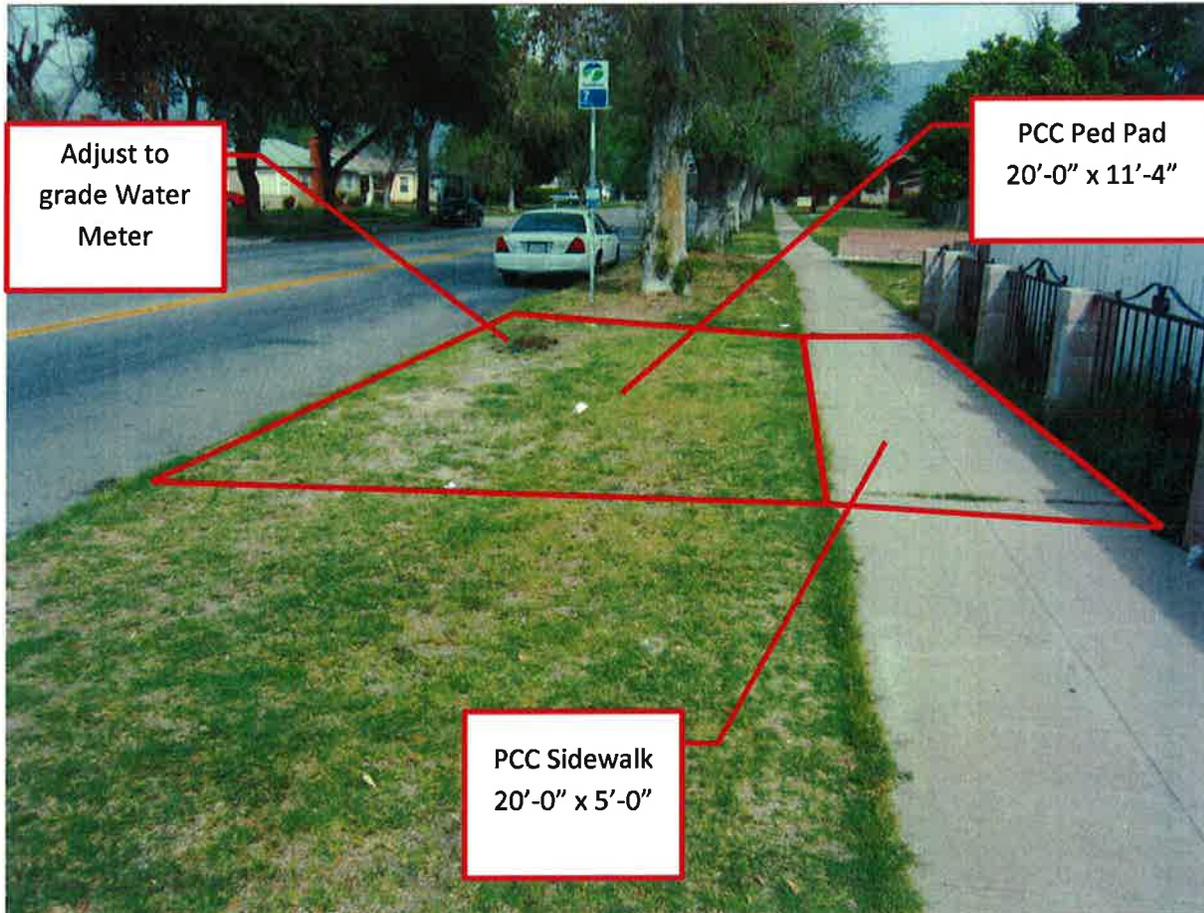

Kendall Dr at "48 Street

Stop 5557

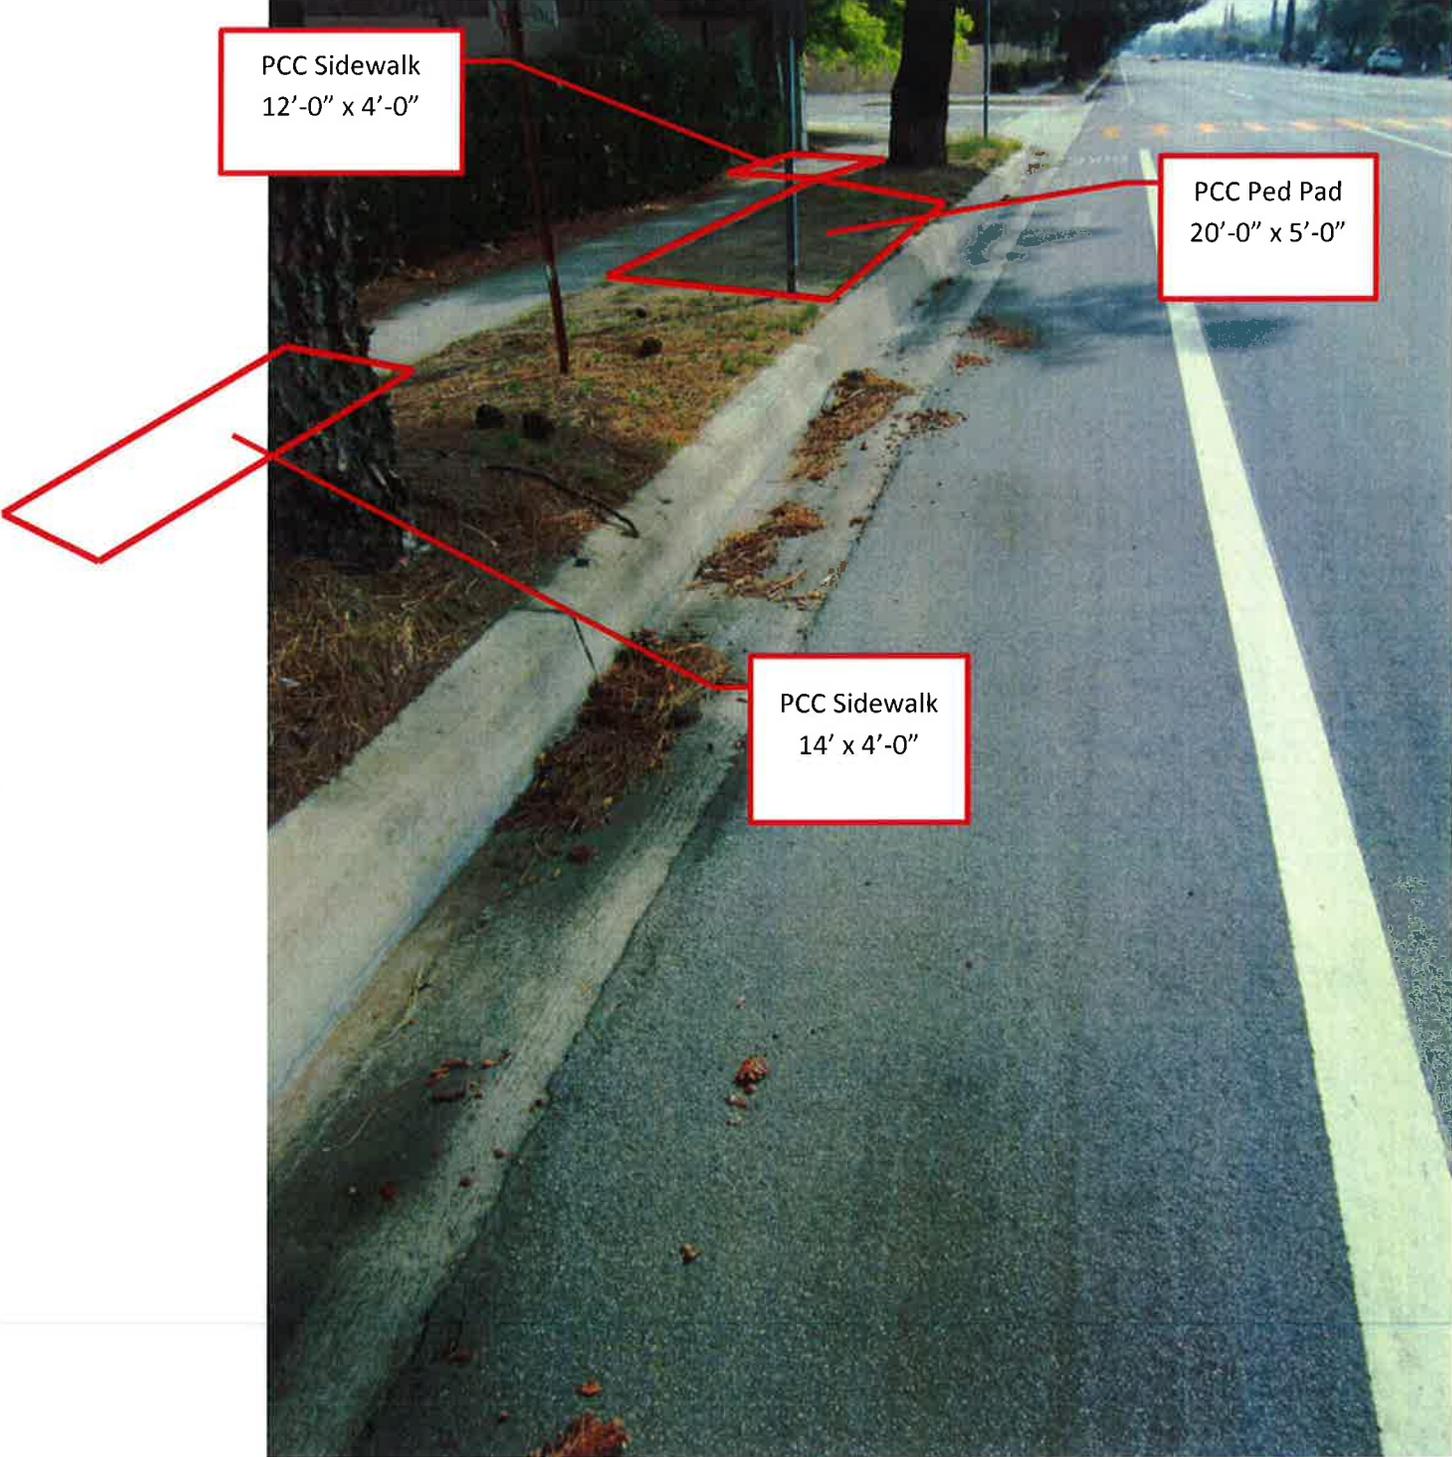


PCC Sidewalk
12'-0" x 4'-0"

PCC Ped Pad
20'-0" x 5'-0"


PCC Sidewalk
14' x 4'-0"

Sierra Way at 19th Street

Stop 5386

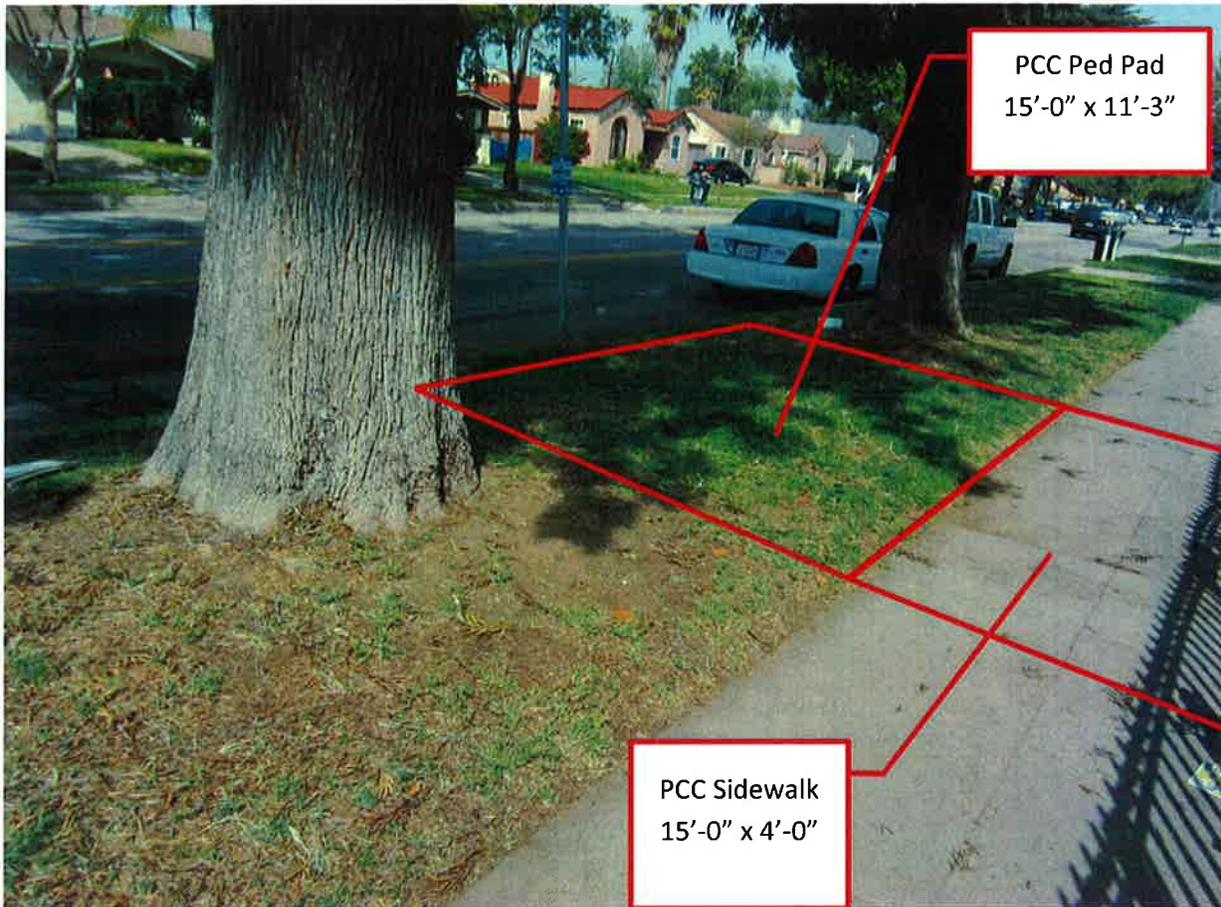

Highland Ave at Leroy Street

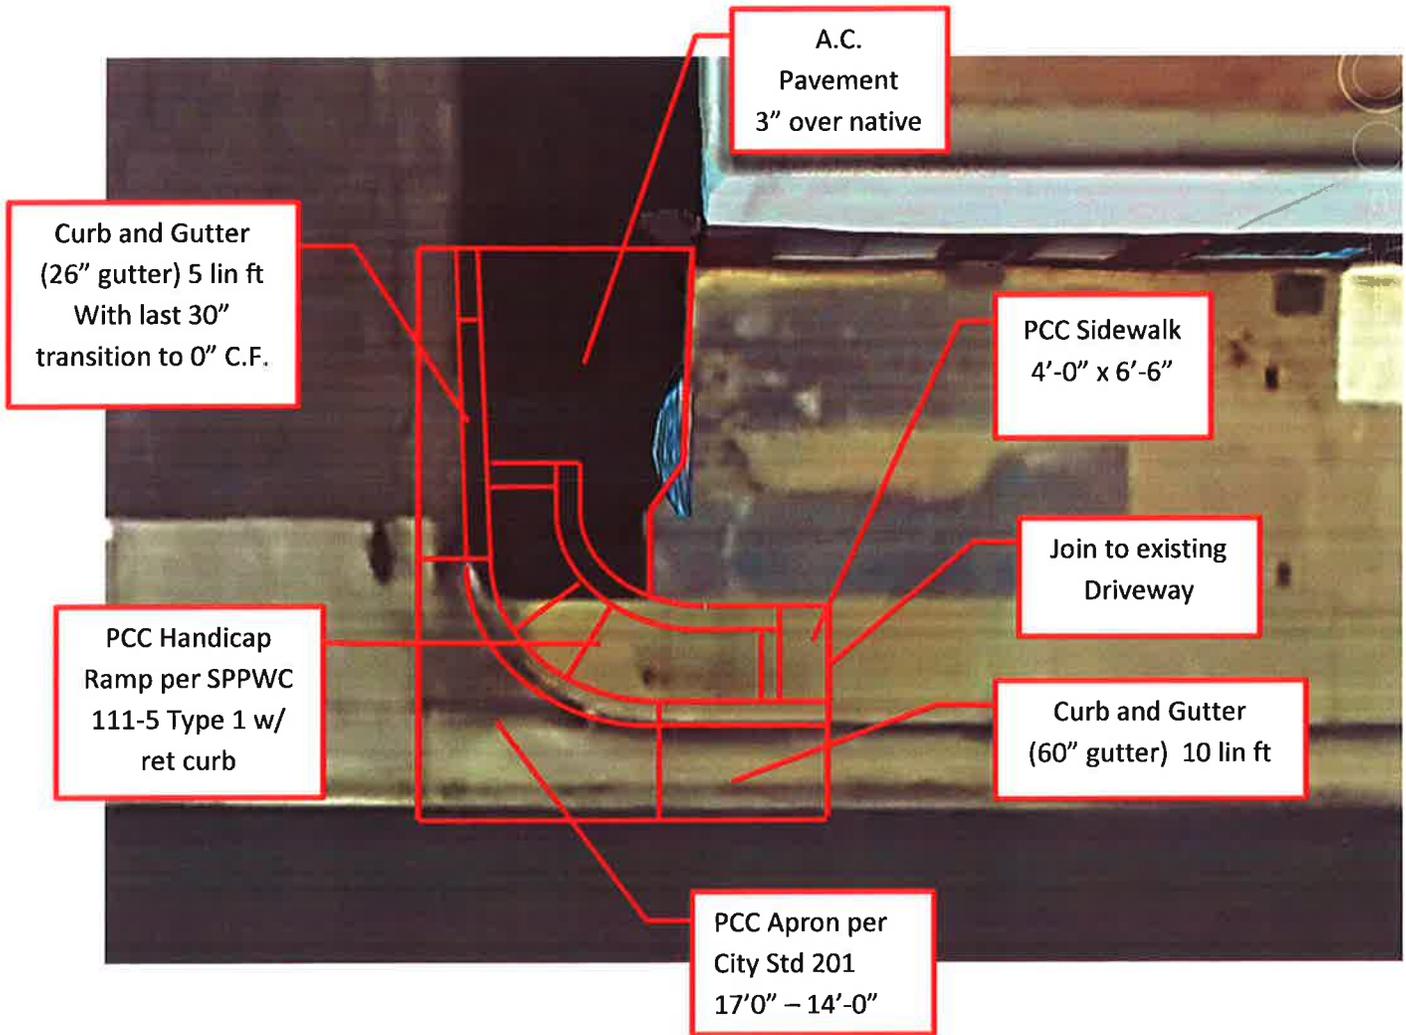

ST

EUREKA

BIRCH ST

Birch St

PCC SIDEWALK
7.5'x16'

PCC Handicap
Ramp per SPPWC
111-5 Case 2
Type 2 w/ret curb

AC PAVEMENT
5'x19'
4" ac/6" base

AC PAVEMENT
5'x22'
4" ac/6" base

PCC Handicap
Ramp per SPPWC
111-5 Case A
Type 3 w/ret curb

6" CURB TYPE "A"
48 LF

PCC SIDEWALK
7.5'x21'

CURB & GUTTER
25 LF
(36" Gutter)

CURB & GUTTER
30 LF
(36" Gutter)

PCC SIDEWALK
6'x5'

PCC SIDEWALK
48'x5'

PCC SIDEWALK
39'x6'

PCC DWY
APPROACH
IN KIND 198 SF

PCC Handicap
Ramp per SPPWC
111-5 Case D
Type 2 w/ret curb

CURB & GUTTER
16 LF
(36" Gutter)

PCC Handicap
Ramp per SPPWC
111-5 Case D
Type 1 w/ret curb

PCC SIDEWALK
10.5'x5'

AC PAVEMENT
3'x15'
4" ac/6" base

AC PAVEMENT
3'x43'
4" ac/6" base

CURB & GUTTER
4 LF
(36" Gutter)

PCC DWY
APPROACH
IN KIND 182 SF

AC PAVEMENT
3'x15'
4" ac/6" base

PCC Handicap
Ramp per SPPWC
111-5 Case D
Type 1 w/ret curb

CURB & GUTTER
4 LF
(36" Gutter)

CURB & GUTTER
4 LF
(36" Gutter)

PCC Handicap
Ramp per SPPWC
111-5 Case D
Type 1 w/ret curb