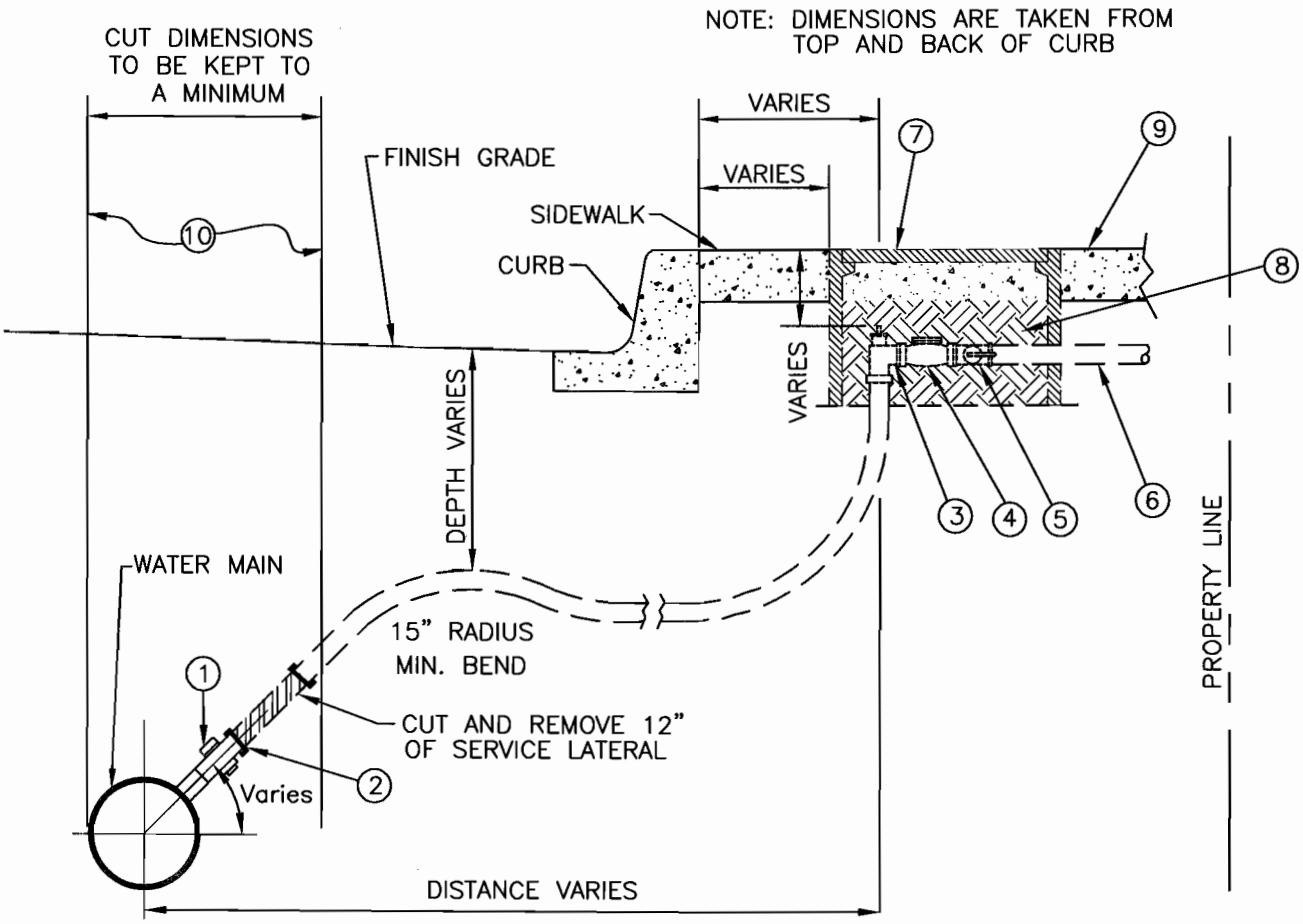

ITEM	QTY	DESCRIPTION
1	1 EA	CLOSE EXISTING CORP STOP
2	1 EA	INSTALL THREADED BRONZE CAP ON CORP STOP, FEMALE OR SOLDERED CAP
3	1 EA	CLOSE LOCKWING ANGLE VALVE
4	1 EA	REMOVE METER AND RETURN TO SBMWD METER SHOP
5	1 EA	CLOSE BALL VALVE
6	1 EA	PRIVATE SERVICE LINE TO REMAIN IN-PLACE
7	1 EA	REMOVE METER BOX LID (METERS LOCATED IN CONCRETE) OR REMOVE ENTIRE METER BOX (METERS LOCATED OUTSIDE CONCRETE)
8	1 EA	BACKFILL METER BOX WITH SELECT BACKFILL AND COMPACT TO = 85% MAX DENSITY
9	1 EA	INSTALL CONCRETE SIDEWALK PER CITY OF SAN BERNARDINO STANDARDS TO NEAREST CONSTRUCTION JOINT
10	1 EA	BACKFILL AND PAVEMENT REPLACEMENT PER SBMWD STD. DWG. W5.1

REVISION DATE: 1/24/2011

D.D.M.	JAN. 11	SAN BERNARDINO MUNICIPAL WATER DEPARTMENT	DRAWING NUMBER
M.J.N.	FEB. 10		
C.L.R.	NOV. 05	**SERVICE ABANDONMENT DETAIL**	SBMWD
M.J.N.	FEB. 04		W1.16
REVISION	DATE	APPROVED MATTHEW H. LITCHFIELD, P.E. RCE 58079 DATE 10/11/11	
SCALE: NONE			