



UNIMPROVED LOCATIONS

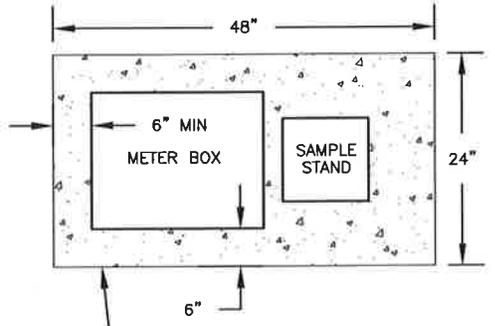


PLAN VIEW

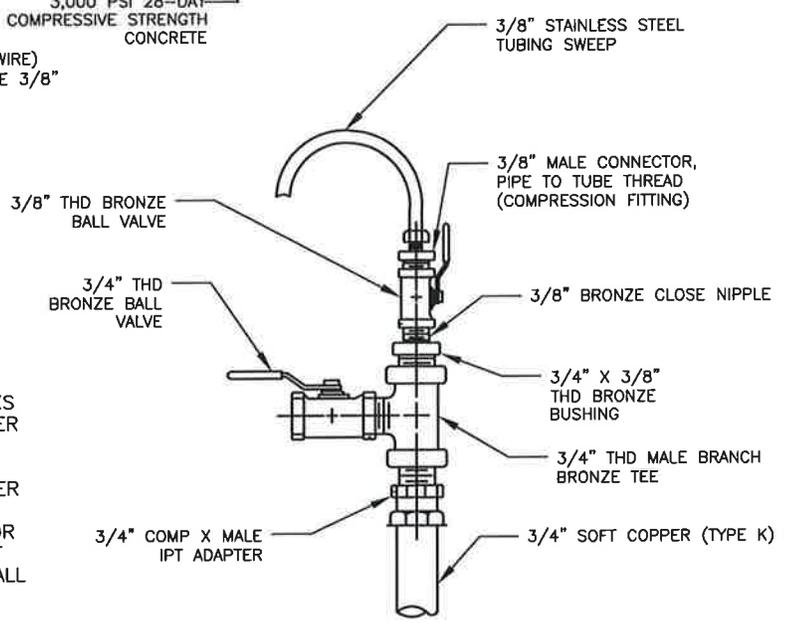

NOTES:

1. SAMPLE STANDS LOCATED WITHIN CONCRETE SIDEWALKS TO BE REMOVED AND SAW CUT IN STRAIGHT LINES EITHER PARALLEL TO THE CURB OR AT RIGHT ANGLES TO THE ALIGNMENT OF THE SIDEWALK. NO SECTION TO BE REPLACED SHALL BE SMALLER THAN 30 INCHES IN EITHER LENGTH OR WIDTH. IF THE SAW CUT FALLS WITHIN 30 INCHES OF A CONSTRUCTION JOINT, EXPANSION JOINT, OR EDGE, THE CONCRETE SHALL BE REMOVED TO THE JOINT OR EDGE, EXCEPT THAT WHERE THE SAW CUT WOULD FALL WITHIN 12 INCHES OF A SCORE MARK, THE SAW CUT SHALL BE MADE IN AND ALONG THE SCORE MARK.

REVISION DATE: 6/5/2014

F.D.L.	JUN. 14	SAN BERNARDINO MUNICIPAL WATER DEPARTMENT	DRAWING NUMBER
F.D.L.	SEP. 13		
F.D.L.	APR. 13		
F.D.L.	JAN. 13		
WATER SAMPLING STAND		SBMWD	W6.1
REVISION	DATE		
APPROVED	DATE		
SCALE: NONE		 MATTHEW H. LITCHFIELD, P.E. RCE 58079	DATE <u>7/28/14</u>